




Eurosign DS P1A is an entry level digital signage player that punches above its weight. Replacing the DS P1, this player has more in common with midrange players thanks to its D2800 dual core platform, solid state design and EurosignDS software. Eurosign DS software requires no special knowledge and the user can quickly create, schedule and play professional content on any third party screen..


- Applications** : **Information & Entertainment Signage**
- Content** : **HD Video, Flash, pictures, RSS, HTML, Menus, Tables.Video Stream**
- Max Zones / Resolution** : **6-8 (recommended) / 720p-1080p**




- Fanless solid state platform
- Built-in player & composer software
- Industry standard Hardware
- Windows 7 embedded OS.
- Intel Atom Dual Core Technology,
- Integrated 1080P HD graphics
- Independent VGA & HDMI outputs
- Solid State 30GB disk
- Ultra small case w/ mounting saddle
- 2 Year warranty

***EurosignDS Players** are turn key appliances which combine with **DS Composer** software to provide a cost effective signage solution that's intuitive to use. DS Composer is pre installed on the player affording a stand alone signage solution. A networked solution is deployed by installing **DS Network Composer** on a client PC. DS Network Composer automatically finds connected DS players, completing the network setup.*

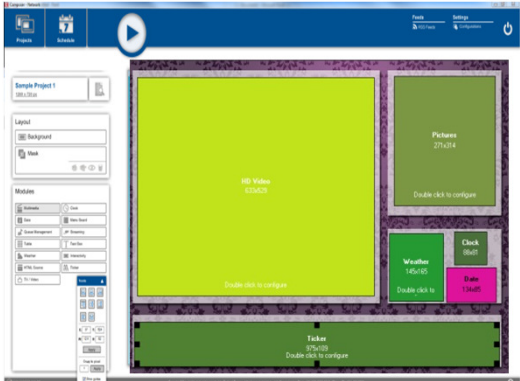

➔



Quickly and easily compose your screen layout; update screen with a click !


DS P1A Player Specification

Processor	Intel Atom DN2800 1.86 GHz w/NM10 Express Chipset
Memory / HDD	2GB DDR-III / 30GB mSATA SSD
I/O & Network	4 x USB 2.0 / Ether net 10/100/1000 Mbps
Video	Intel HD Graphics 1080P – HDMI & VGA independent outputs
Audio	Stereo Speaker out / Line In
Operating System	Windows 7 Embedded
Application S/W	EurosignDS Player, Eurosign Player Monitor, EurosignDS Composer
Power Supply	60W external adapter
Dimensions	178 x 178 x 38 mm
Environmental / Regulatory Specifications	Operating Temp: Ambient with air flow from 0°C ~ 40°C Storage Temp: -20°C ~ 60°C Humidity: 10% ~90% @40°C CE Compliant
Warranty	2 years (swap-out)
Accessories Supplied	Mounting Saddle, Vertical Stand, Rubber Feet

EurosignDS Configurations



Stand Alone : Single platform for composer and signage screen

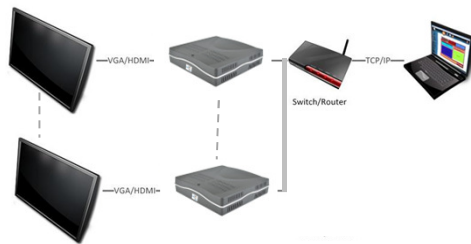

Local Network : Compose on networked PC and deliver to 1 or more DS players.



Internet : Compose on networked PC's and deliver to many DS players.

Your EurosignDS representative is: