


Eurosign DS P3 is a high performance digital signage player designed for high definition multimedia applications. Eurosign DS software requires no special knowledge and the user can quickly create, schedule and play professional content on any third party screen..

- Player Type** : High Performance Digital Signage Player
- Applications** : Information & Entertainment Signage
- Content** : Multi-zone HD Video, Flash, pictures, RSS, Live TV, HTML, Video Stream, Interactive Touch
- Max Zones / Resolution** : Unlimited / 1080p



- Fanless Media platform
- Built-in player & composer software
- Industry standard Hardware
- Windows 7 embedded OS.
- Intel Core i5 Technology,
- Intel® QM67 HD graphics
- VGA, DVI-D, HDMI out
- High capacity disk drive
- Optional Solid State Disk
- Dual Channel Option
- 2 Year warranty

*Eurosign DS Players are turn key appliances which combine with **DS Composer** software to provide a cost effective signage solution that's intuitive to use. DS Composer is pre installed on the player affording a stand alone signage solution. A networked solution is deployed by installing **DS Network Composer** on a client PC. DS Network Composer automatically finds connected DS players, completing the network setup.*

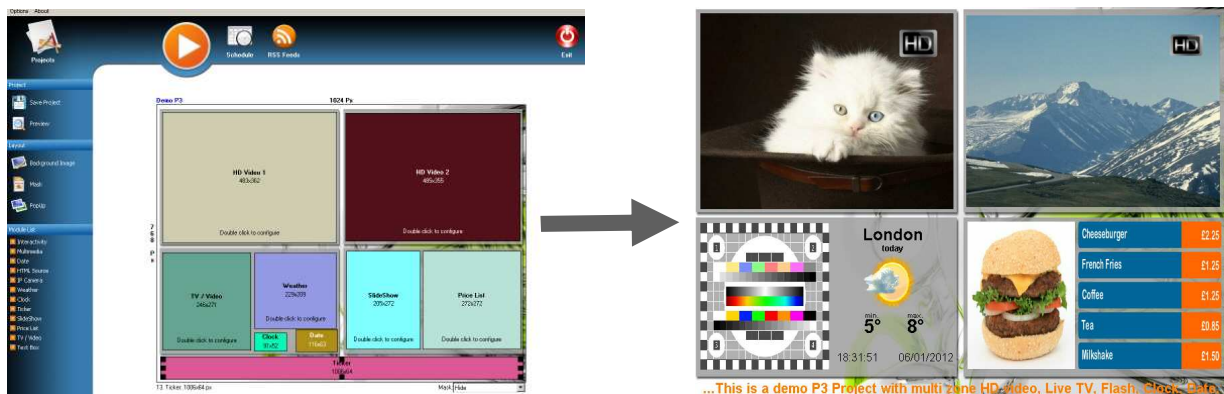

...This is a demo P3 Project with multi-zone HD Video, Live TV, Flash, Click, RSS, Weather, Price list, Slideshow and RSS....

Quickly and easily compose your screen layout; update screen with a click !


DS P3 Player Specification

Processor / Chipset	Intel Core i5 2.26GHz / Intel QM67
Memory / HDD	4GB DDR-III / 160GB SATA
I/O	4 x USB 2.0, 2x RS232
Network	2x 10/100/1000 Mbps Ethernet
Video	HDMI/DVI-D & VGA dual independent outputs
Audio	1 x Line Out ; 1 x SPDIF
Operating System	Windows 7 Embedded
Application S/W	Eurosign DS Player, Eurosign Player Monitor Eurosign DS Local Composer
Power Supply	96W external adapter
Dimensions	250 x 194 x 40 mm
Environmental / Regulatory Specifications	Operating Temp: Ambient with air flow from 0°C ~ 40°C (HDD inside). Storage Temp: -20°C ~ 80°C Humidity: 10% ~ 90% (non-condensing) CE & FCC Class A
Warranty	2 years

Eurosign DS Configurations



Stand Alone : Single platform for composer and signage screen

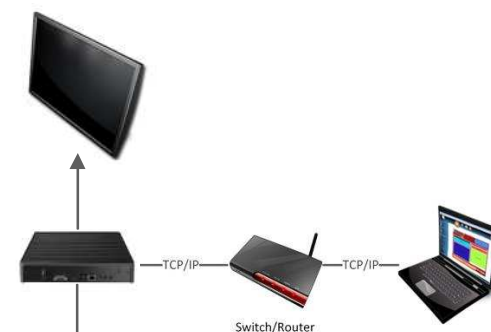

Dual Channel (Option)
Two independent DS channels.



Network : Compose on networked pc and deliver to 1 or more DS players

Eurosign DS is distributed and supported by Radiant Europe,

Radiant Europe
Rubicon Centre, CIT Campus, Bishopstown, Cork Ireland

Phone : IRL 021 4928900 UK 020 3239 5815

